




BR 40/2x1250

RADYAL MATKAP TEZGAHI RADIAL DRILLING MACHINE

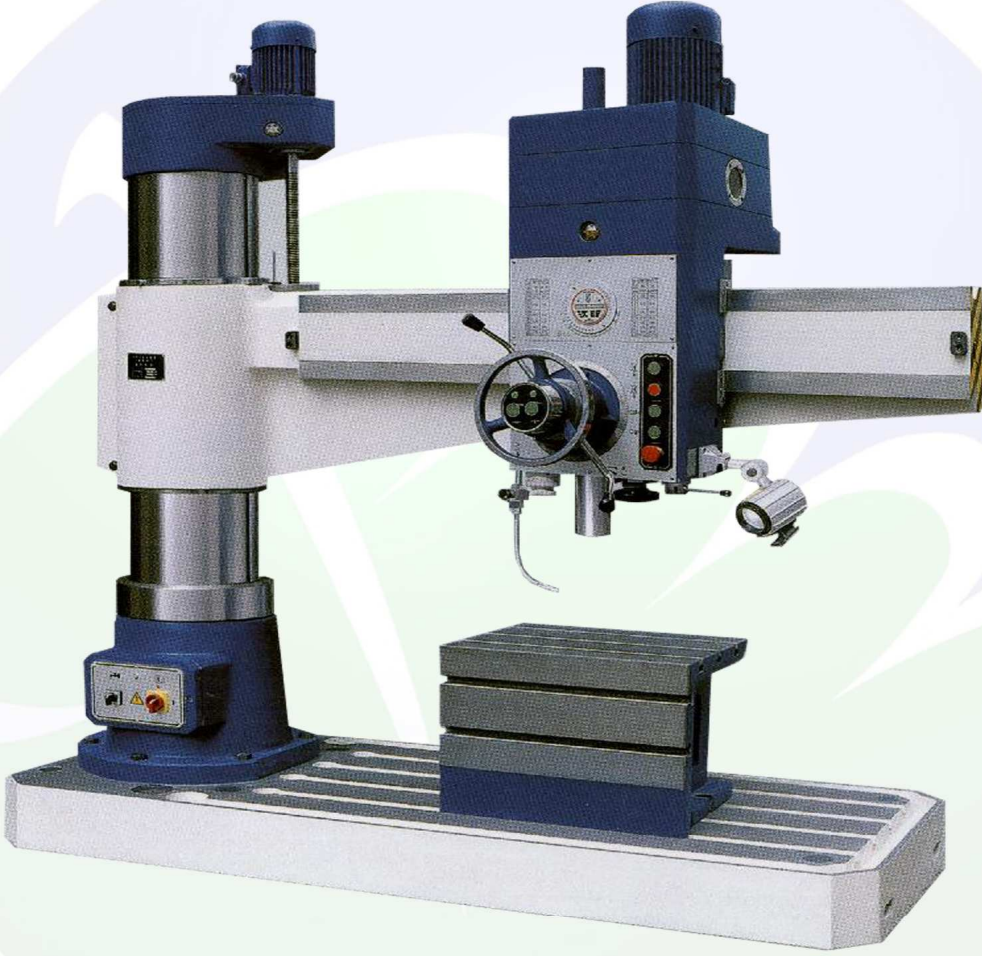

- ÜRETİMİMİZ OLAN BR 40/2x1250 TİP RADYAL MATKAP TEZGAHI; ÇELİK, PİK, HAFİF METALLER, AHŞAP VE PLASTİK MALZEMELERDE, DELME, DELİK İŞLEME VE DİŞ AÇMA OPERASYONLARINDA YÜKSEK HASSASİYET SAĞLAYAN SON TEKNOLOJİK GELİŞMELERLE DONATILMIŞ MODERN DİZAYNIYLA BENZERLERİ ARASINDA SEÇKİN BİR YERE SAHPTİR. RİJİT YAPISI VE RADYAL KOLUN ELEKTRO-MEKANİK KİLİTLEME ÖZELLİĞİYLE HER TÜRLÜ DELME İŞLEMLERİNDE GÜVENİLİR BİR TEZGAHTIR.

- TAKSAN RADIAL DRILLING MACHINES ARE SUITABLE BOTH FOR INDIVIDUAL AND SERIES PRODUCTION AND ENSURE HIGH EFFICIENCY IN DRILLING, REAMING, COUNTER BORING, AND THREAD CUTTING OF WORK MADE OF STEEL, CASTING, AND NON-FERROUS METALS AS WELL AS OF WOOD AND PLASTICS.

- RADIAL DRILLING MACHINES ARE PARTICULARLY SUITED FOR PERFORMING DIFFICULT MACHINING OPERATIONS ON GEAR BOXES, CASING AND OTHER WORK TYPES IN STEEL CONSTRUCTION, MACHINE BUILDING, AND JIG AND FIXTURE MANUFACTURE

DRILLING		DELME	
MAX.DRILLING DIAMETER	MAX.DELME ÇAPİ (St60)	40	mm
MAX.DRILLING DIAMETER	MAX.DELME ÇAPİ (DDL20)		mm
WORKING RANGES		KILAVUZ ÇEKME	
MAX. THREAD CUTTING (St 60)(METRIC)	METRIK DİŞ (St60)-(DDL 20)		mm
MAX. THREAD CUTTING (St 60)(INCH)	PARMAK SİSTEMİNE GÖRE DİŞ (St 60)		inch
MAX. THREAD CUTTING (DDL 20)(INCH)	PARMAK SİSTEMİNE GÖRE DİŞ (DDL 20)		inch
DISTANCE SPINDLE CENTER TO COLUMN. (MIN-MAX)	İŞMİLİ MERKEZİ İLE SÜTÜN ARASINDAKİ UZAKLIK(MIN-MAX)	350-1250	mm
DISTANCE SPINDLE HEAD TO BASEPLATE (MIN-MAX)	İŞ MİLİ KAFASI İLE TABLA PLAKASI ARASINDAKİ UZAKLIK (MIN-MAX)	350-1375	mm
SWIVELLING RADIUS OF DRILLING SPINDLE	İŞ MİLİ DÖNME YARIÇAPİ (MIN.-MAX)		mm
SWIVELLING RANGE OF RADIAL ARM	KOLUN DÖNÜŞ AÇISI		
CLAMPING SURFACE OF BASEPLATE(WxL)	TABLA PLAKASI (GENİŞLİK x UZUNLUK)		mm
DRILLING SPINDLE		İŞMİLİ	
TAPER NO (DIN 228)	İŞMİLİ KONIĞI (DIN 228)	4	MT/MK
MAX. STROKE	İŞ MİLİ STROĞU	315	mm
MAX.TORQUE	MAX.TORK		Nm
MAX.FEED TORQUE	MAX.İLERLEME KUVVETİ		N
SPEEDS		HIZLAR	
NUMBER OF RATES	HIZ BAŞAMAK SAYISI / ORANI	16	
SPEED RANGE	DEVİR SAYISI ARALIĞI	25 - 2000	rpm(d/dak)
FEED		İLERLEMELER (DIN 803'E GÖRE)	
NO.OF INCREMENTS	KADEME SAYISI /ORANI	16	
RANGE R5	İLERLEME HIZ ARALIĞI	0.04-3.2	(mm/m)mm/d
MOTORS		MOTORLAR	
POWER OF MAIN MOTOR	ANA MÖTÖR	3	kW
FLOOR SPACE		TEZGAH ÖLÇÜLERİ	
LENGTH	UZUNLUK	2150	mm
WIDTH	GENİŞLİK	1070	mm
HEIGHT	YÜKSEKLİK	2840	
NET WEIGHT		NET AĞIRLIK	
STANDARD MACHINE	TEZGAH	3000	kg

STANDARD ACCESSORIES / STANDART AKSESUARLAR

COOLANT EQUIPMENT / SOĞUTMA DONANIMI
MACHINE LIGHTING (24V.) / AYDINLATMA DONANIMI (24V.)
CONTROL UNIT / ELEKTRİK DONANIMI
GREASE PUMP / GRES POMPASI
SPANNERS / ÖZEL ALYEN VE AY ANAHTAR
OPERATING MANUAL / KULLANMA VE BAKIM KİTABI
TACOMETER / TAKOMETRE

OPTIONAL ACCESSORIES / ÖZEL AKSESUARLAR (*)


- 500x630 mm CUBIC TABLE (FIXED) / 500x630 mm KÜBİK (SABİT) TABLA
- MACHINE VISE SX-200 / SABİT MENGENE SX-200

(*) Opsiyon : Müşteride adapte edilebilen aksesuar / Option : Accessory to be adapted on customer site


(**) Versiyon : Sadece Fabrikamızda adapte edilebilen aksesuar / Version : Accessory to be adapted only at our factory




HIGH DRILLING CAPACITY
YÜKSEK DELME KAPASİTESİ



AUTOMATIC FEED WITH 6 STEPS
6 KADEMELİ OTOMATİK İLERLEME



360° SWIVELING RANGE OF RADIAL ARM
360° DÖNER KOL



ANGLE TABLE (ADJUSTABLE)
YATAR AÇILI TABLA